



# Environmental Product Declaration

## U.S. Laminated Veneer Lumber

American Wood Council



# ASTM Certified Environmental Product Declaration

PROGRAM OPERATOR	ASTM International 100 Barr Harbor Drive PO Box C700 West Conshohocken, PA, 19428-2959 USA www.astm.org	 <b>ASTM INTERNATIONAL</b> Helping our world work better
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	ASTM Program Operator Rules. Version: 8.0, Revised 04/29/20	
DECLARATION OWNER	American Wood Council	 <b>AMERICAN WOOD COUNCIL</b>
DECLARATION NUMBER	EPD 1053	
DECLARED PRODUCT	Laminated Veneer Lumber produced in the United States	
DECLARED UNIT	One cubic meter (1 m <sup>3</sup> ) of Laminated Veneer Lumber	
REFERENCE PCR AND VERSION NUMBER	ISO 21930:2017 Sustainability in Building and Civil Engineering works – Core Rules for environmental Product Declaration of Construction Products and Services. [9]  UL Environment: Product Category Rules for Building-Related Products and Services Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report, v3.2 2018 [16] Part B: Structural and Architectural Wood Products EPD Requirements, v1.1 2020 [17]	
DESCRIPTION OF PRODUCT'S INTENDED APPLICATION AND USE	Laminated Veneer Lumber is used in building construction (residential and commercial), furniture manufacturer, and others.	
MARKETS OF APPLICABILITY	Construction Sector, North America	
DATE OF ISSUE	August 9, 2025	
PERIOD OF VALIDITY	5 years	
EPD TYPE	Industry-average	
EPD SCOPE	Cradle to gate	
YEAR OF REPORTED MANUFACTURER PRIMARY DATA	2023	
LCA SOFTWARE	SimaPro v9.6	
LCI DATABASES	USLCI [11], Ecoinvent 3.9.1 [18], Datasmart 2023 [10]	

---

**LCIA METHODOLOGY**TRACI 2.1 v1.08 [4], CML-IA Baseline V3.08, CED, LHV 1.0

---


**THE SUB-CATEGORY PCR REVIEW  
WAS CONDUCTED BY:**Dr. Thomas Gloria (chair)  
t.gloria@industrial-ecology.com

---

**LCA AND EPD DEVELOPER**

This life cycle assessment was  
conducted in accordance with ISO  
14044 and the reference PCR by:

The Consortium for Research on Renewable Industrial Materials (CORRIM)  
PO Box 2432  
Corvallis, OR 97330  
541-231-2627  
[www.corrim.org](http://www.corrim.org)



---

This declaration was independently verified in accordance with ISO 14025:2006 [6].

The UL Environment "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report," v3.2 (December 2018), in conformance with ISO 21930:2017 with additional considerations from the USGBC/UL Environment Part A Enhancement (2017).

Tim Brooke, ASTM International

☐ Internal ☒ x External

---

**INDEPENDENT VERIFIER**

This life cycle assessment was  
independently verified in accordance  
with ISO 14044 and the reference PCR  
by:

Thomas Gloria, Ph.D., Industrial Ecology Consultants

---

**LIMITATIONS**

- Environmental declarations from different programs (ISO 14025) may not be comparable.
  - Comparison of the environmental performance of Structural and Architectural Wood Products using EPD information shall be based on the product's use and impacts at the construction works level, and therefore EPDs may not be used for comparability purposes when not considering the construction works energy use phase as instructed under this PCR.
  - Full conformance with the PCR for laminated veneer lumber allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards (ISO 21930:2017 §5.5, use the same sub-category Part B PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. It should be noted that different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.
-

# Description of Industry and Product

## Description of Laminated Veneer Lumber Industry

Laminated veneer lumber (LVL) is a structural building material that belongs to the general category of engineered wood products and to the more specific group of structural composite lumber. LVL is used extensively for scaffold plants and in the flanges of prefabricated I-joists. Beams made from LVL are used as headers and major load-carrying elements in construction. Other common uses for LVL are as substitutes for solid wood studs of wall and roof construction. Non-structural applications of LVL include windows and doors.

The LVL production region represented in this EPD includes facilities located in the Western and Southern regions of the United States (U.S.). LVL production facilities accounted for 73 percent (46 MMCF; 1.2 million m<sup>3</sup>) of the 63 million MMCF of U.S. LVL capacity in 2023 ([FEA 2024](#)). Of the reporting facilities, the annual production ranged from about 1,293 MCF to over 9,111 MCF, with a weighted average of 5,382 MCF (152,398 m<sup>3</sup>).

This EPD represents the cradle-to-gate energy and materials required for manufacturing LVL in the U.S. All members of the American Wood Council (AWC), Softwood Lumber Board (SLB), and/or APA – The Engineered Wood Association that meet the eligibility requirement are participants in this EPD.

LVL is categorized by United Nations Standard Products and Services Code (UNSPSC) 111220 00 under Engineered Wood Products and Construction Specifications Institute (CSI) codes for wood framing, engineered wood products, heavy timber, and laminated veneer lumber (Table 1).

**Table 1. United Nations Standard Products and Services Code (UNSPSC) and Construction Specification Institute (CSI) MasterFormat Code for Laminated Veneer Lumber.**

Classification Standard	Category	Subcategory	Product Code
UNSPSC	Engineered wood products		111220 00
CSI/CSC	Laminated Veneer Lumber	Wood Framing	06 11 00
		Engineered Wood Products	06 11 13
		Heavy Timber	06 13 23
		Laminated Veneer Lumber	06 17 13

Southern pine dominates the species mix for LVL mills responses, representing 65 percent (Table 2), followed by Douglas-fir at 34 percent, and poplar at 0.06 percent. Southern pine is a mixture of several species with similar characteristics. The species are primarily longleaf pine (*Pinus palustris*), loblolly pine (*P. taeda*), shortleaf pine (*P. echinata*), and slash pine (*P. elliottii*).

**Table 2. Species and Representation for Laminated Veneer Lumber.**

Species Grouping	Scientific Name	Survey Composition
Southern Pine	<i>Pinus spp.</i>	65.53%
Douglas-fir	<i>Pseudotsuga menziesii</i>	34.47%
		100%

## Description of Product

Laminated veneer lumber is produced through a multi-step process that transforms thin wood veneers into a high strength engineered wood product. The process begins by peeling logs into thin sheets of veneer using a rotary lathe. Veneers are then dried to a specific moisture content and graded for strength and quality. A waterproof adhesive resin is applied to the veneer sheets, which are layered with the grain of each layer running parallel to the next. The stack is pressed under heat and pressure to cure the adhesive and bond the layers into a solid billet<sup>1</sup>. Once cured, the LVL billet is cut to desired dimensions for use in structural applications such as beams, headers, and flanges for I-joists.

Laminated veneer lumber falls into the North American Industry Classification System (NAICS) Code 321215 – Engineered Wood Member (except truss) Manufacturing, which includes other structural wood engineered products such as finger joint lumber, I-joists, parallel strand lumber, and glued laminated timbers (USCB 2012; ASTM 2014).



---

<sup>1</sup> An LVL billet is a large, solid block of LVL that has been formed by bonding multiple layers of wood veneer together with adhesive, all with the grain oriented in the same direction. This billet is the intermediate product created during manufacturing, before being cut down into smaller, usable structural components. LVL billets are typically produced in standardized sizes and can be several feet wide, deep, and many feet long, depending on the manufacturer's specifications.



The product profile presented in this EPD is for a declared unit of 1 cubic meter (1 m<sup>3</sup>) of LVL. One cubic meter of LVL weighs 541 kg, excluding the variable moisture content (Table 3).

**Table 3. Properties of 1 m<sup>3</sup> Laminated Veneer Lumber.**


Average Product Composition	Unit	Weighted Avg.
Mass of product	kg	572.18
Density, oven dry	kg/m <sup>3</sup>	541.53
Density @ 6% MC	kg/m <sup>3</sup>	572.18
Moisture Content	%	5.66

## Laminated Veneer Lumber Production

Lay-up lines are used to arrange pieces of the proper grades of dry veneer into the assembly process, apply resin to the veneer, and assemble the veneers into a mat before pressing (Bergman and Alanya-Rosenbaum 2020). At the start of the line, a veneer feeder assembly places pieces of veneer into the lay-up sequence according to the type of LVL produced. Even though LVL can vary in thickness and width, it is most commonly produced in the dimensions of 4.45-cm (1-3/4-in) thick, 121.9-cm (4-ft) wide, and 2.44- to 18.29-m (8- to 60-ft) long. After pieces of veneer are arranged onto the lay-up conveyor, resin is applied to each piece of veneer, except for the top veneer layer in the LVL billet. After resin has been applied, the LVL mat is assembled layer by layer.

From the lay-up line, the uncured LVL billet is sent for hot-pressing. The heat and pressure applied during hydraulic pressing cures the resin, thus binding the veneer layers together. Cold-pressing can also occur at some production facilities when wider LVL billet beams are produced.

After pressing, the LVL billet is sawn to the desired dimensions. The LVL can now be manufactured into flanges for I-joists. After sawing, a protective and cosmetic sealant is sometimes applied to the LVL.

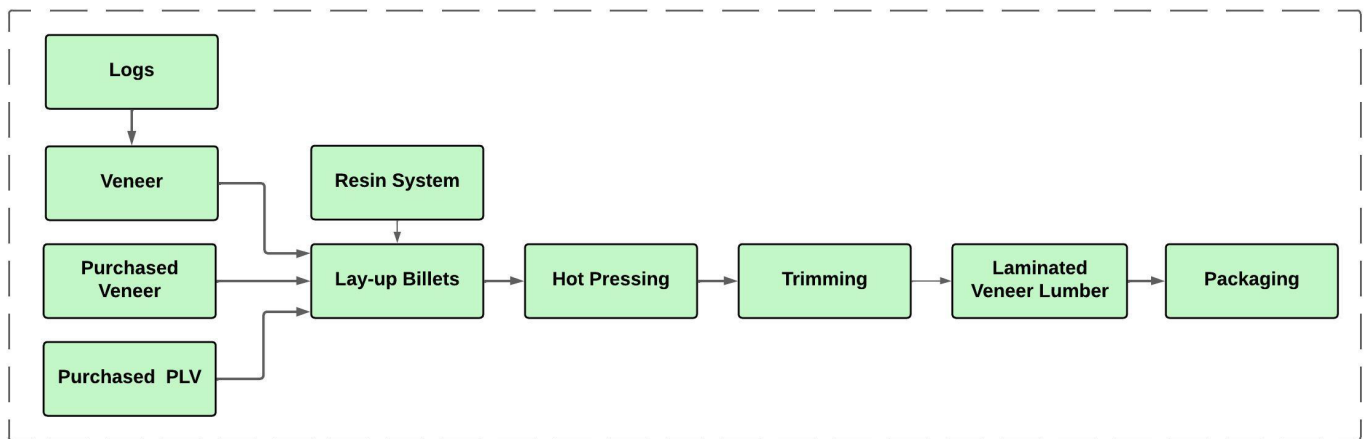

**Figure 1. Flow diagram of the Production Process of Laminated Veneer Lumber**

Packing materials represent only 0.26 percent of the mass of the main product. The wood stickers and dunnage make up the bulk of the mass, representing 86 percent of the total packaging. The wrapping materials represent 11 percent and strapping and cardboard at 3 percent of the total packaging mass.

## Methodological Framework

The underlying LCA [14] was performed in conformance with ISO 14040/44 [7,8], ISO 21930 [9] and EN15804 [5], as well as the PCR.

### Type of EPD and Life Cycle Stages

This EPD is intended to represent an industry wide life cycle assessment (LCA) for LVL in the U.S. Eleven facilities contributed production data, resource use, energy and fuel use, transportation distances, and onsite processing emissions. These data were weighted average based on production to produce the life cycle inventory data for the life cycle impact assessment (LCIA). The underlying LCA [14] investigates LVL production from cradle-to-gate. Information modules included in the LCA are shown in Table 6. This EPD includes mandatory modules A1-A3 for a cradle-to-gate analysis.

**Table 4. Life Cycle Stages & Information Modules per ISO 21930.**

PRODUCTION STAGE			CONSTRUCTION STAGE		USE STAGE							END-OF-LIFE STAGE				OPTIONAL BENEFITS
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Extraction and up-stream production	Transport to factory	Manufacturing	Transport to site	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Building Operational Energy Use During Product Use	Building Operational Water Use During Product Use	Deconstruction	Transport	Waste	Disposal	Reuse, Recycle, & Recovery benefits
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

# System Boundaries and Product Flow Diagram

The product system described in Figure 2 includes the following information modules and unit processes:

<b>A1 - RAW MATERIAL EXTRACTION</b>	<p>A1 includes the cradle to gate forestry operation where applicable, which may include nursery operations (which include fertilizer, irrigation, energy for greenhouses if applicable etc.), site preparation, as well as planting, fertilization, thinning and other management operations [12].</p> <p>A1 includes the cradle to gate production of veneer and PLV [15].</p> <p>A1 includes the cradle to gate resin production data [3].</p>
<b>A2 - RAW MATERIAL TRANSPORT</b>	<p>Average or specific transportation of raw materials (including secondary materials and fuels) from extraction site or source to manufacturing site (including any recovered materials from source to be recycled in the process).</p>
<b>A3 - MANUFACTURING</b>	<p>Manufacturing of LVL including energy consumption and fuel use, resource use, water use, emissions to air and water, waste disposal, and packaging.</p> <p>Packaging materials represent less than one percent (0.26%) of the mass of the main product. The packaging is allocated 100 percent to LVL.</p>





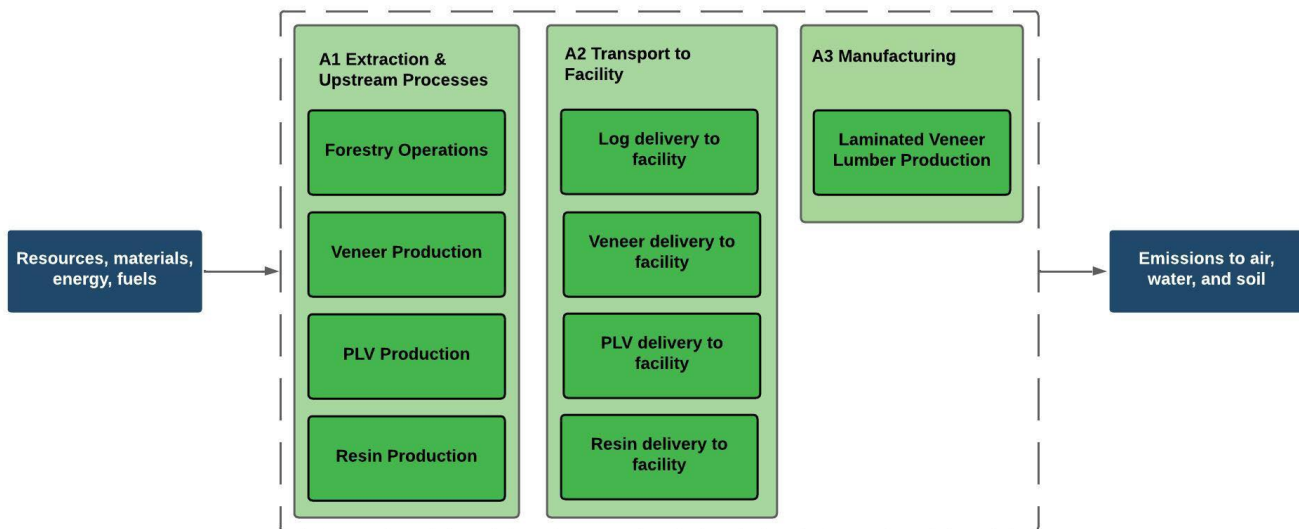


Figure 2. Cradle-to-Gate (A1-A3) System Boundary for Laminated Veneer Lumber Production.

## Declared Unit

The declared product consists of softwood veneers. The percent composition is shown in Table 7.

Table 5. Product Composition.

Product Component	Percentage of Declared Product
Softwood veneers	95.87%
Resins, additives, and sealants	4.13%



## Allocation Methods

---

Allocation is the method used to partition the environmental load of a process when several products or functions share the same process. The input material for producing LVL is a round log with bark. Processing the log involves multiple steps with generation of by-products (e.g., sawdust, chips, bark). Following the PCR (UL 2018, 2020) and ISO 21930:2017, allocation is based on physical properties (e.g., mass or volume). For this study, a mass allocation was achieved for the primary product and subsequent by-products. Some by-products used internally were used for on-site energy generation. Packaging inputs are not related to the by-products and are allocated 100% to the final product.

## Cut-off Criteria

---

The cut-off criteria for all activity stage flows considered within the system boundary conform with ISO 21930: 2017 Section 7.1.8. Specifically, the cut-off criteria were applied as follows:

- All inputs and outputs for which data are available are included in the calculated effects and no collected core process data are excluded.
- A one percent cut-off is considered for renewable and non-renewable primary energy consumption and the total mass of inputs within a unit process. The sum of the total neglected flows does not exceed 5% of all energy consumption and mass of inputs.
- All flows known to contribute a significant impact or to uncertainty are included.
- The cut-off rules are not applied to hazardous and toxic material flows – all of which are included in the life cycle inventory.

No material or energy input or output was knowingly excluded from the system boundary.

## Data Sources

---

Primary and secondary data sources, as well as the respective data quality assessment, are documented in the underlying LCA project report in accordance with UL PCR 2020.

Third party verified ISO [6,7,8] secondary LCI data sets contribute 39-100% of total impact to any of the required impact categories identified by the applicable PCR [16,17].

## Treatment of Biogenic Carbon

---

Biogenic carbon emissions and removals are reported in accordance with ISO 21930 7.2.7. and 7.2.12. ISO 21930 requires a demonstration of forest sustainability to characterize carbon removals with a factor of -1 kg CO<sub>2</sub>eq/kg CO<sub>2</sub>. ISO 21930 Section 7.2.11 Note 2 states the following regarding demonstrating forest sustainability: “Other evidence such as national reporting under the United Nations Framework Convention on Climate Change (UNFCCC) can be used to identify forests with stable or increasing forest carbon stocks.” The United States UNFCCC annual report Table 6-1 provides annual NET GHG Flux Estimates for different land use categories. This reporting indicates non-decreasing forest carbon stocks and thus the source forests meet the conditions for characterization of removals with a factor of -1 kg CO<sub>2</sub>eq/kg CO<sub>2</sub>.

## Environmental Parameters Derived from the LCA

The impact categories and characterization factors for the LCIA were derived from the U.S. EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts – TRACI 2.1 v1.08 [4]. The total primary energy consumption is tabulated from the LCI results based on the Cumulative Energy Demand Method (CED, LHV, V1.0) published by Ecoinvent [18]. Lower heating value of primary energy carriers is used to calculate the primary energy values reported in the study.

Other inventory parameters concerning material use, waste, water use, and biogenic carbon were drawn from the LCI results. We followed the ACLCA's Guidance to Calculating non-LCIA Inventory Metrics in accordance with ISO 21930:2017 [1]. SimaPro 9.6 [13] was used to organize and accumulate the LCI data, and to calculate the LCIA results (Table 8).





**Table 6. Selected Impact Category Indicators and Inventory Parameters.**

Core Mandatory Impact Indicator	Abbreviation	Units	Method
Global warming potential, Total	GWP <sub>TOTAL</sub>	kg CO <sub>2</sub> eq	GWP <sub>BIOGENIC</sub> + GWP <sub>FOSSIL</sub>
Global warming potential, Biogenic	GWP <sub>BIOGENIC</sub>	kg CO <sub>2</sub> eq	TRACI 2.1 V1.08+ LCI Indicator
Global warming potential, Fossil	GWP <sub>FOSSIL</sub>	kg CO <sub>2</sub> eq	TRACI 2.1 V1.08
Depletion potential of the stratospheric ozone layer	ODP	kg CFC11eq	TRACI 2.1 V1.08
Acidification potential of soil and water sources	AP	kg SO <sub>2</sub> eq	TRACI 2.1 V1.08
Eutrophication potential	EP	kg N eq	TRACI 2.1 V1.08
Formation potential of tropospheric ozone	SFP	kg O <sub>3</sub> eq	TRACI 2.1 V1.08
Abiotic depletion potential (ADP fossil) for fossil resources;	ADP <sub>f</sub>	MJ, LHV	CML-IA Baseline V3.08
Fossil fuel depletion	FFD	MJ Surplus	TRACI 2.1 V1.08
<b>Use of Primary Resources</b>			
Renewable primary energy carrier used as energy	RPRE	MJ, LHV	CED (LHV) V1.00
Renewable primary energy carrier used as material	RPRM	MJ, LHV	LCI Indicator
Non-renewable primary energy carrier used as energy	NRPRE	MJ, LHV	CED (LHV) V1.00
Renewable primary energy carrier used as material	NRPRM	MJ, LHV	LCI Indicator
<b>Secondary material, secondary fuel and recovered energy</b>			
Secondary material	SM	kg	LCI Indicator
Renewable secondary fuel	RSF	MJ, LHV	LCI Indicator
Non-renewable secondary fuel	NRSF	MJ, LHV	LCI Indicator
Recovered energy	RE	MJ, LHV	LCI Indicator
<b>Mandatory Inventory Parameters</b>			
Consumption of freshwater resources;	FW	m <sup>3</sup>	LCI Indicator
<b>Indicators Describing Waste</b>			
Hazardous waste disposed	HWD	kg	LCI Indicator
Non-hazardous waste disposed	NHWD	kg	LCI Indicator
High-level radioactive waste, conditioned, to final repository	HLRW	m <sup>3</sup>	LCI Indicator
Intermediate- and low-level radioactive waste, conditioned, to final repository	ILLRW	m <sup>3</sup>	LCI Indicator
Components for re-use	CRU	kg	LCI Indicator
Materials for recycling	MR	kg	LCI Indicator
Materials for energy recovery	MER	kg	LCI Indicator
Recovered energy exported from the product system	EE	MJ, LHV	LCI Indicator
<b>Additional Inventory Parameters</b>			
Biogenic Carbon Removal from Product	BCRP	kg CO <sub>2</sub>	LCI Indicator
Biogenic Carbon Emission from Product	BCEP	kg CO <sub>2</sub>	LCI Indicator
Biogenic Carbon Removal from Packaging	BCRK	kg CO <sub>2</sub>	LCI Indicator
Biogenic Carbon Emission from Packaging	BCEK	kg CO <sub>2</sub>	LCI Indicator
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production	BCEW	kg CO <sub>2</sub>	LCI Indicator

## Life Cycle Impact Assessment Results

Tables 9-11 present the cradle-to-gate (A1-A3) LCIA and LCI parameter results for the declared unit of one m<sup>3</sup> of LVL. No permanent carbon storage is included in the cradle-to-gate (A1-A3) results. As a result, the biogenic carbon balance for the cradle-to-gate portion of the life cycle is net neutral. Cradle-to-gate results for LVL on a relative basis are presented in Tables 12-13 and Figure 3.

**Table 7. Cradle-to-Gate LCIA Results for 1 m<sup>3</sup> of Laminated Veneer Lumber – Absolute Basis.**

Core Mandatory Impact Indicator	Total	A1	A2	A3
GWP <sub>TOTAL</sub> [kg CO <sub>2</sub> eq]	270.74	(1,004.75)	24.82	1,250.66
GWP <sub>BIOGENIC</sub> [kg CO <sub>2</sub> eq]	0.00	(1,178.16)	0.00	1,178.16
GWP <sub>FOSSIL</sub> [kg CO <sub>2</sub> eq]	270.74	173.41	24.82	72.51
ODP [kg CF-11eq]	3.70E-05	3.64E-05	4.38E-08	5.28E-07
AP [kg SO <sub>2</sub> eq]	1.2129	0.9013	0.1378	0.1737
EP [kg N eq]	0.5823	0.3623	0.0111	0.2089
SFP [kg O <sub>3</sub> eq]	29.61	22.06	3.98	3.57
FFD [MJ, surplus]	560.22	387.44	46.63	126.15
ADP <sub>FOSSIL</sub> [MJ, LHV]	4,038.13	2,765.24	310.57	962.31

**Table 8. Cradle-to-Gate Resource Use Results for 1 m<sup>3</sup> of Laminated Veneer Lumber – Absolute Basis.**

Use of Primary Resources	Total	A1	A2	A3
RPRE [MJ, LHV]	3,797.78	3,220.94	0.71	576.13
RPRM [MJ, LHV]	11,913.00	11,913.00	0.00	0.00
NRPRE [MJ, LHV]	4,524.93	3,001.50	315.13	1,208.29
NRPRM [MJ, LHV]	706.86	706.86	0.00	0.00
SM [kg]	0.00	0.00	0.00	0.00
RSF [MJ, LHV]	0.00	0.00	0.00	0.00
NRSF [MJ, LHV]	0.00	0.00	0.00	0.00
RE [MJ, LHV]	0.00	0.00	0.00	0.00
FW [m <sup>3</sup> ]	1.4211	1.0761	0.0028	0.3423

**Table 9. Cradle-to-Gate Output Flows for 1 m<sup>3</sup> of Laminated Veneer Lumber – Absolute Basis.**

Indicators Describing Waste	Total	A1	A2	A3
HWD [kg]	1.89E-02	9.60E-03	3.68E-04	8.96E-03
NHWD [kg]	1.87E+01	1.19E+01	2.30E+00	4.52E+00
HLRW [m <sup>3</sup> ]	4.30E-07	1.66E-07	0.00E+00	2.64E-07
ILLRW [m <sup>3</sup> ]	4.11E-06	1.67E-06	2.47E-08	2.42E-06
CRU [kg]	0.00	0.00	0.00	0.00
MR [kg]	0.00	0.00	0.00	0.00
MER [kg]	0.00	0.00	0.00	0.00
EE [MJ, LHV]	0.00	0.00	0.00	0.00



**Table 10. Cradle-to-Gate LCIA Results for 1 m<sup>3</sup> of Laminated Veneer Lumber – Relative Basis.**

Core Mandatory Impact Indicator	Total	A1	A2	A3
GWP <sub>FOSSIL</sub> [kg CO <sub>2</sub> eq]	100%	64.0%	9.2%	26.8%
ODP [kg CF-11eq]	100%	98.5%	0.1%	1.4%
AP [kg SO <sub>2</sub> eq]	100%	74.3%	11.4%	14.3%
EP [kg N eq]	100%	62.2%	1.9%	35.9%
SFP [kg O <sub>3</sub> eq]	100%	74.5%	13.4%	12.1%
FFD [MJ, surplus]	100%	68.5%	7.7%	23.8%
ADP <sub>FOSSIL</sub> [MJ, LHV]	100%	69.2%	8.3%	22.5%

**Table 11. Cradle-to-Gate Resource Use Results for 1 m<sup>3</sup> of Laminated Veneer Lumber – Relative Basis.**


Use of Primary Resources	Total	A1	A2	A3
RPRE [MJ, LHV]	100%	84.8%	0.0%	15.2%
RPRM [MJ, LHV]	100%	100.0%	0.0%	0.0%
NRPRE [MJ, LHV]	100%	66.3%	7.0%	26.7%
NRPRM [MJ, LHV]	0%	100.0%	0.0%	0.0%
FW [m <sup>3</sup> ]	100%	36%	0%	64%

**Table 12. Cradle-to-Gate Output Flows for 1 m<sup>3</sup> of Laminated Veneer Lumber – Relative Basis.**

Indicators Describing Waste	Total	A1	A2	A3
HWD [kg]	100%	50.7%	1.9%	47.3%
NHWD [kg]	100%	63.6%	12.3%	24.2%
HLRW [m <sup>3</sup> ]	100%	38.6%	0.0%	61.4%
ILLRW [m <sup>3</sup> ]	100%	40.6%	0.6%	58.8%





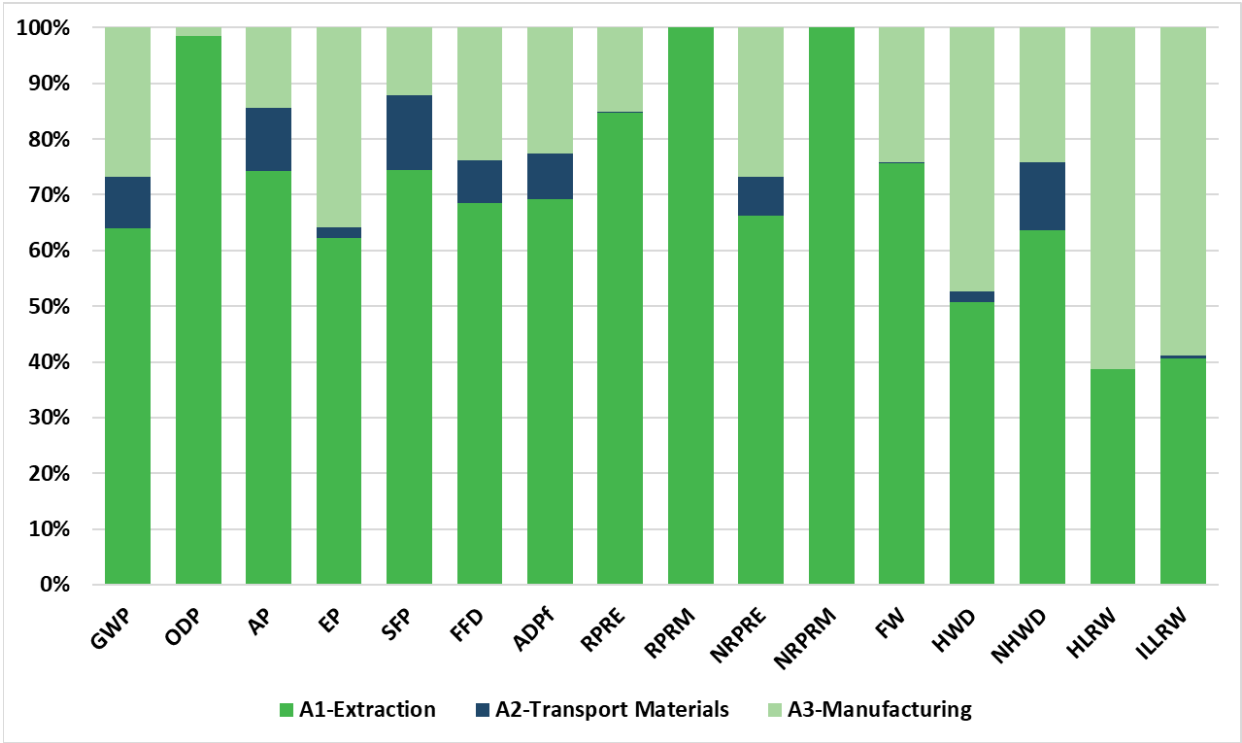

- GWP

Global warming potential
- ODP

Depletion potential of the stratospheric ozone layer
- AP

Acidification potential of soil and water sources
- EP

Eutrophication potential
- SFP

Formation potential of tropospheric ozone
- ADP<sub>f</sub>

Abiotic depletion potential (ADP fossil) for fossil resource
- FFD

Fossil fuel depletion
- RPRM

Renewable primary energy carrier used as energy
- RPRM

Renewable primary energy carrier used as material.
- NRPE

Non-renewable primary energy carrier used as energy.
- NRPRM

Renewable primary energy carrier used as material.
- FW

Consumption of freshwater resources
- HWD

Hazardous waste disposed.
- NHWD

Non-hazardous waste disposed.
- HLRW

High-level radioactive waste, conditioned, to final repository
- ILLRW

Intermediate- and low-level radioactive waste, conditioned to final repository

Figure 3. Cradle-to-Gate LCIA Results for the Production Laminated Veneer Lumber – Relative Basis.



## Biogenic Carbon Results

### Cradle-to-Gate Results

Wood is a biobased material and thus contains biogenic carbon. The accounting of biogenic carbon follows the requirements set out in ISO 21930:2017 where biogenic carbon enters the product system (removal) as primary or secondary material. Carbon removal is considered a negative emission. The biogenic carbon leaves the system (emission) as a product, by-products, or directly to the atmosphere when combusted for heat energy. These mass flows of biogenic carbon from and to nature are listed in the LCI and are expressed in kg CO<sub>2</sub>.

Table 15 shows the biogenic carbon removal and emissions. All carbon dioxide flows (kg CO<sub>2</sub>) presented in Table 15 are unallocated to include by-products leaving the system boundary in module A3. Even though the system boundary for this LCA only includes module A1-A3, in accordance with ISO 21930, emission from packaging (BCEK) is reported in A5-Construction and emission from the main product (BCEP) is reported in C3/C4-End-of-Life<sup>2</sup>. The net carbon emission across the cradle-to-gate life cycle is zero. It is assumed that all carbon removed from the atmosphere is eventually emitted to the atmosphere as CO<sub>2</sub>.

**Table 13. Biogenic Carbon Inventory Parameters for 1 m<sup>3</sup> of Laminated Veneer Lumber, Unallocated.**

	A1	A2	A3	A5	C3/C4	Total
BCRP [kg CO <sub>2</sub> ]	(1,178.16)	0.00	0.00	0.00	0.00	(1,178.16)
BCEP [kg CO <sub>2</sub> ]	0.00	0.00	144.25	0.00	992.81	1,137.06
BCRK [kg CO <sub>2</sub> ]	0.00	0.00	(2.64)	0.00	0.00	(2.64)
BCEK [kg CO <sub>2</sub> ]	0.00	0.00	0.00	2.64	0.00	2.64
BCEW [kg CO <sub>2</sub> ]	0.00	0.00	41.10	0.00	0.00	41.10

### Cradle-to-Grave Results

The product system represented in this EPD includes the information modules 'A1 Extraction and upstream production', 'A2 Transport to factory' and 'A3 Manufacturing'. As per ISO 21930, the net biogenic carbon emissions across the reported modules are zero (carbon neutral). This conservative assumption excludes the permanent sequestration of biogenic carbon if the LCA were to consider the typical end-of-life treatment for wood products, landfilling.

UL Environment published an addendum to the reference PCR that estimates the emissions from landfilling of wood products (UL 2020 Appendix A). The carbon sequestration addendum is based on the United States EPA WARM model and aligns with the biogenic accounting rules in ISO 21930 Section 7.2.7 and Section 7.2.12. Because the end-of-life fate of this material is unknown, we have applied the default disposal pathway from the PCR Part A (UL 2018) Section 2.8.5, 100% landfill.

<sup>2</sup> These products are reported in modules outside the scope of this LCA system boundary to provide reference for EoL waste and emissions if a full cradle-to-grave LCA were to be performed.



The following results apply the addendum methodology (UL 2020 Appendix A) to the biogenic carbon present in the primary product as it leaves the manufacturer in Module A3<sup>3</sup>.

1 m<sup>3</sup> LVL = 541.53 oven dry kg = 270.77 kg carbon = 992.80 kg CO<sub>2</sub> eq

Carbon sequestered in product at manufacturing gate:  
992.80 kg CO<sub>2</sub> eq = -992.80 kg CO<sub>2</sub> eq

Methane emitted from fugitive landfill gas:  
1.91 kg CH<sub>4</sub> = 48.89 kg CO<sub>2</sub> eq emission<sup>4</sup>

Carbon dioxide emitted from fugitive landfill gas and the combustion captured landfill gas:  
111.56 kg CO<sub>2</sub> eq emission<sup>5</sup>

**Permanent carbon sequestration, net of biogenic carbon emissions:**  
833.36 kg CO<sub>2</sub> eq = -833.36 kg CO<sub>2</sub> eq emission<sup>6</sup>



<sup>3</sup> Background assumptions for EoL and 100% Landfill: methane emission = 3.53E-03 kg CH<sub>4</sub>/kg dry wood; carbon dioxide emission = 2.06E-01 kg CO<sub>2</sub>/kg dry wood (UL 2020).

<sup>4</sup> Methane emissions= 3.53E-03 kg CH<sub>4</sub>/kg of dry wood X 541.53 kg of dry wood = 1.91 kg CH<sub>4</sub>; kg CO<sub>2</sub> eq = 1.91 kg CH<sub>4</sub> X 25.05 kg CH<sub>4</sub>/kg CO<sub>2</sub> eq = 47.89 kg CO<sub>2</sub> eq

<sup>5</sup> Carbon dioxide emissions= 2.06E-01 kg CO<sub>2</sub>/kg of dry wood X 541.53 = 111.56 kg CO<sub>2</sub>

<sup>6</sup> Final sequestration, net of biogenic emissions = CO<sub>2</sub> eq in product at gate = 992.80 – (47.89 + 111.56) = 833.36 kg CO<sub>2</sub> eq

# LCA Interpretation

## Comparability

---

Environmental declarations from different programs [6] may not be comparable. Comparison of the environmental performance using EPD information shall consider all relevant information modules over the full life cycle of the products within the building. This PCR allows EPD comparability only when the same functional requirements between products are ensured and the requirements of ISO 21930:2017 §5.5 are met. In addition, to be compared, EPDs must comply with the same core and sub-category PCRs (Part A and B) and include all relevant information modules. It should be noted that different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.

## Limitations

---

This LCA was created using manufacturer average data for upstream materials. Variation can result from differences in supplier locations, manufacturing processes, manufacturing efficiency and fuel type used. This LCA does not report all of the environmental impacts due to manufacturing of the product but rather reports the environmental impacts for those categories with established LCA-based methods to track and report. Unreported environmental impacts include (but are not limited to) factors attributable to human health, land use change, and habitat destruction. In order to assess the local impacts of product manufacturing, additional analysis is required.

## Additional Environmental Information

---

According to ISO 21930 section 9.6, a manufacturer is required to report hazardous and/or dangerous substances. Drying and pressing processes contribute to the production of emissions during LVL manufacturing. Mills classed as major sources under EPA rules are required to report methanol, formaldehyde, phenol, acetaldehyde, propionaldehyde, and acrolein which are on the US Environmental Agency (EPA) Toxics Release Inventory. These emissions are reported in this EPD.

Laminated veneer lumber production facilities obtain their wood fiber from sources that are legally and sustainably sourced. Participating facilities reported Fiber Sourcing data for the three sourcing categories established in ASTM-D7612-21: Standard Practice for Categorizing Wood and Wood-Based Products According to Their Fiber Sources [2]. The standard provides criteria for differentiating wood products into three categories:

1. Non-controversial Sources of Forest Products,
2. Responsible Sources of Forest Products, and
3. Certified Sources of Forest Products.

Fiber from non-controversial, or legal, sources are from geographic areas with a low risk of illegal activity and are compliant with legal or other proprietary standards. Products from responsible sources are produced with wood fiber acquired according to an independently certified procurement standard or are from jurisdictions with regulatory or quasi-regulatory programs to implement best management practices. Independently certified procurement standards include FSC Controlled Wood and SFI Fiber Sourcing. To qualify for either standard, an LVL mill must have a system in place that verifies their logs are coming from areas in compliance with forestry best management practices to protect air and water quality and ensure all fiber comes from known and legal sources. Products from certified sources are independently certified to an internationally recognized forest management certification standard, such as those from the



Sustainable Forestry Initiative (SFI), Forest Stewardship Council (FSC), Programme for the Endorsement of Forest Certification (PEFC), American Tree Farm System (ATFS), or the Canadian Standards Association (CSA).

The eleven facilities represented in this regional LCA reported on average, 100% of the fiber entering their mills to be non-controversial (legal), 100% to be responsible (following a certified procurement standard), and 34.8% from independently certified forests.

## **Forest Management**

---

While this EPD does not address landscape level forest management impacts that influence forest carbon, wildlife habitat, endangered species, and soil and water quality, these potential impacts may be addressed through requirements put forth in regional regulatory frameworks, ASTM 7612-21 guidance, and ISO 21930 Section 7.2.11 including notes therein. These documents, combined with this EPD, may provide a more complete picture of environmental and social performance of wood products.

## **Scope of the EPD**

---

EPDs can complement but cannot replace tools and certifications that are designed to address environmental impacts and/or set performance thresholds, e.g., Type 1 certifications, health assessments and declarations, etc.

## **Data**

---

National or regional life cycle averaged data for raw material extraction does not distinguish between extraction practices at specific sites and can greatly affect the resulting impacts.

## **Accuracy of Results**

---

EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any product line and reported impact when averaging data.

## **Photo credits**

Boise Cascade Page 5, 17

Pacific Wood Tech Page 8

Roseburg Forest Products Page 9

## References

1. American Center for Life Cycle Assessment. 2019/ ACLCA Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017.
2. ASTM Standard D7612-21. 2021. "Standard Practice for Categorizing Wood and Wood-Based Products According to Their Fiber Sources." ASTM International, West Conshohocken, PA, 2021. DOI: 10.1520/D7612-21.
3. Athena Sustainable Materials Institute. 2022. A cradle-to-gate life cycle assessment of North American Wood Products Resin Systems. 93pp. [https://www.athenasmi.org/wp-content/uploads/2022/03/Wood Resins LCA Report Final Athena With CRS Feb 2022.pdf](https://www.athenasmi.org/wp-content/uploads/2022/03/Wood_Resins_LCA_Report_Final_Athena_With_CRS_Feb_2022.pdf) (Accessed March 6, 20225)
4. Bare, J. 2012. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI) - Version 2.1.
5. EN 15804. 2012. Sustainability of construction works, Environmental product declaration, Core rules for the product category of construction products. 47pp.
6. International Organization for Standardization. 2006. ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and procedures.
7. International Organization for Standardization ISO. 2006b. Environmental management—Life-cycle assessment—Principles and framework. ISO 14040. International Organization for Standardization, Geneva, Switzerland. 14040:2006/Amd1:2020. 20 pp/8 pp.
8. International Organization for Standardization ISO. 2006a. Environmental management—Life-cycle assessment—Requirements and guidelines. ISO 14044:2006/Amd1:2017/Amd:2:2020. International Organization for Standardization, Geneva, Switzerland. 46 pp/8 pp/12 pp/.
9. International Organization for Standardization. 2017. International Standard ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
10. LTS. 2023. DataSmart: <https://longtrailsustainability.com/software/datasmart-life-cycle-inventory/> (Accessed May 2024).
11. National Renewable Energy Laboratory. 2023. U.S. Life Cycle Inventory Database <http://www.nrel.gov/lci/>. (Accessed May 2024).
12. Oneil, E. 2021. Cradle to gate life cycle assessment of US regional forest resources – US Southern Pine Forests. 41pp. [https://corrim.org/wp-content/uploads/2021/12/CORRIM SE Forest Resources LCA Report.pdf](https://corrim.org/wp-content/uploads/2021/12/CORRIM_SE_Forest_Resources_LCA_Report.pdf). (Accessed February 25, 2025).
13. PRé Consultants BV. 2022. SimaPro v9.5 LCA Software.
14. Puettmann, M. 2025. CORRIM Report. Life cycle assessment of laminated veneer lumber production. 38pp.
15. Puettmann, M. 2025. CORRIM Report. Life cycle assessment of softwood plywood production – Western Region. 41pp.
16. UL Environment. 2018. Product Category Rule (PCR) Guidance for Building-Related Products and Services, Part A Life Cycle Assessment Calculation Rules and Report Requirements, UL 10010, v.3.2.
17. UL Environment. 2020. Product Category Rule (PCR) Guidance for Building-Related Products and Services, Part B: Structural and Architectural Wood Products EPD Requirements, UL 10010-9 v.1.1.
18. Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., & Weidema, B. 2016. The Ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, 21, 1218–1230.